



Introducing LIFT-U's *NEW*

"Low Rise Lift"

*Designed for 24 inch or less low rise applications,
such as Churches, Board Rooms, Council Chambers, etc.*



Ready for use



Safety barrier up



Lift at upper level

- *Fully self contained*
- *Steel sidewall panels are powder coated to blend in with your projects surroundings*
- *Requires minimal site preparation*
- *No pit required*
- *All-electric, quiet operation*

For More Information:
Web: <http://liftu.hoganmfg.com>
Email: Information@hoganmfg.com


Tel: 937-836-6900
Fax: 937-836-6901



081215



Low-Rise Lift (Model VML)

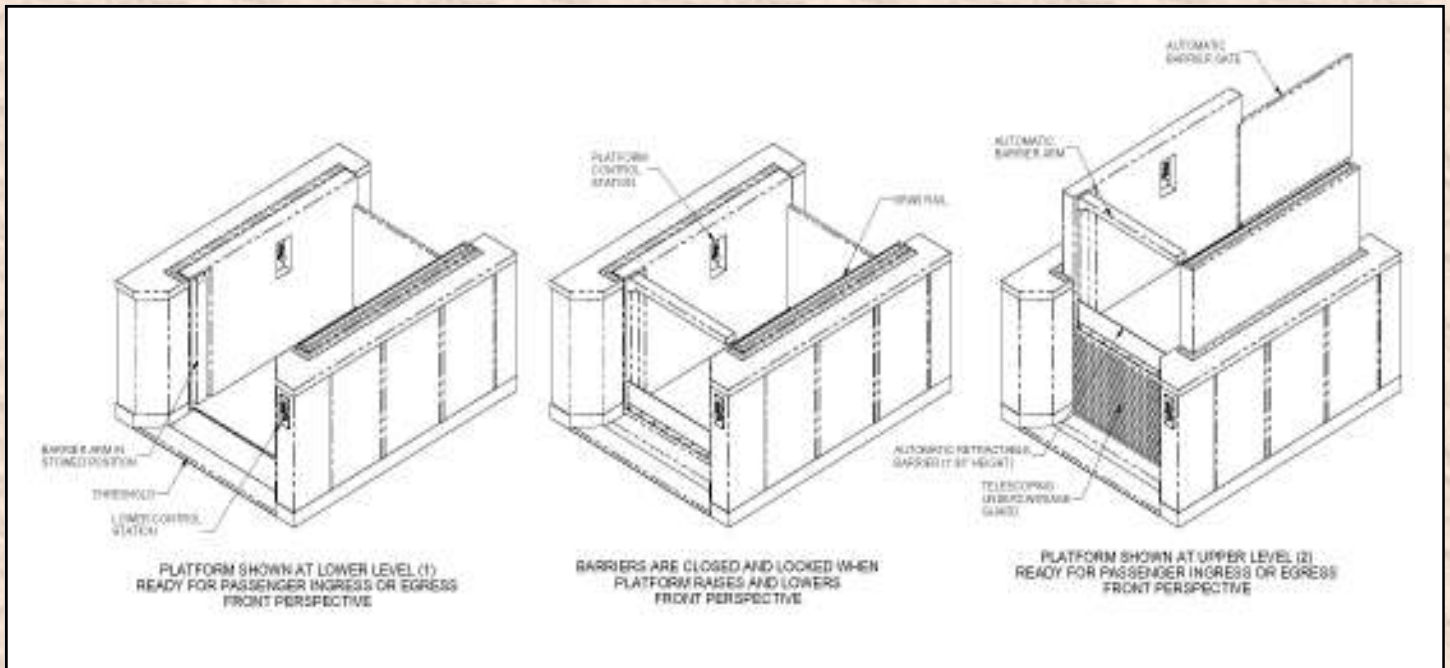

Product Specifications – Low Rise Lift

Overall Dimensions

60.25 inches wide x 75.3 inches long.
Fully assembled unit weighs approximately 1400 lbs.

Lift

Vertical travel is up to 24 inches.
Rated capacity is 750 lbs.
All-electric drive system.
No pit required.

Safeties

Redundant safeties assure reliable operation.
Powered Barrier Arm at lower level.
Powered Door at upper level.

Warranty

All parts are covered for one year from installation date. Extended warranty available for an additional cost.

Finishes

Standard show surface is textured powder coat.
Standard color is brown or tan.
Wood grain powder coated finish available for an additional cost.

Power and Controls

Independent operation.
Main power 115 VAC, 15A, 3-wire, single phase.
Battery back-up is standard equipment.
24VDC controls used.
Supplied with upper level, lower level, and platform controls.

Code Compliance

Lift complies with ASME A18.1 - 2008; However, due to various State and Local codes, a variance may be required from the "Authority Having Jurisdiction" (AHJ). Please contact LIFT-U prior to the beginning of design or construction for further assistance.

Internet Resources Available

- CSI- 3 part specifications
- PDF - product drawings -AutoCAD® available upon request

(Patent Pending)



Web: <http://liftu.hoganmfg.com>

Email: Information@hoganmfg.com

