



# LIFT-U<sup>®</sup>



## *Courtroom Wheelchair Lifts* *Universal Access for Witnesses and Judges*

- ▶ Lift function is virtually invisible
- ▶ Requires minimal site preparation
- ▶ Efficient use of courtroom space
- ▶ All electric, no hydraulic bleed down

*Product Design Files At **Autodesk** Seek*

### **Accessor I Model VMW**

Four screw jack design sets on the courtroom floor and requires "no pit". Screw jacks are encased in the millwork walls.



### **Accessor II Model VMX**

Scissor-screw design utilizes a recess (pit) in the floor for installation. Minimizes impact on millwork walls.



*"The Accessor courtroom lift is an excellent addition and example of what we are attempting to achieve with the Courtroom 21 Project —that is demonstrating how technology can best be used to improve all components of the legal system".*

*Fredric Lederer  
Chancellor Professor of Law  
William & Mary Law School, and Director of  
The Center For Legal and Court Technology and The Courtroom 21 Project*



**Website: <http://liftu.hoganmfg.com>**


# Accessor I and II

## Courtroom Wheelchair Lifts


(Patents Pending)

All Electric Drive - Quiet Operation

Accessor I (VMW)

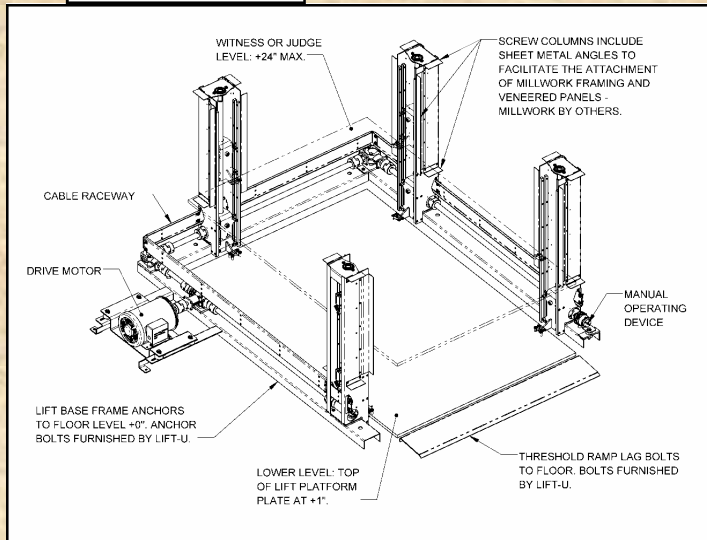

Accessor II (VMX)

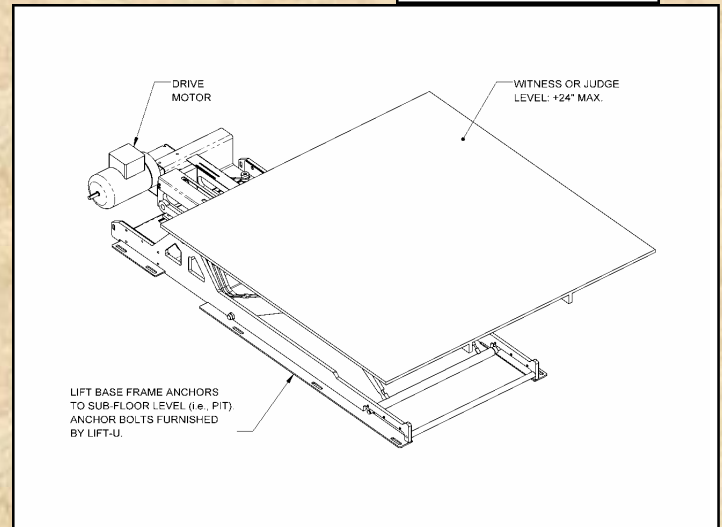

*Free CAD design assistance available at no charge or obligation*

### Overall Dimensions

Platform parks at witness level until needed  
Platform size is determined by the application

### Lift

Vertical travel is up to 24 inches  
Rated capacity is 750 lbs  
All electric motor drive - no hydraulic bleed down  
No pit required for Accessor I  
Pit required for Accessor II (6 inch)

### Construction

Steel components are used for reliable operation  
Corrosion resistant finishes on all surfaces

### Optional Accessories Available

Roll-up barrier for roll off protection available for platforms adjacent to stationary landings  
Automated retractable step offered for access to upper landings if applicable

### Safety

Redundant safeties assure reliable operation  
Microprocessor monitors all safety points and stops if unsafe condition is detected

### Power and Controls

Independent operation  
Main power 115 VAC, 15A, 3-wire, single phase  
Battery backup available at an additional cost  
24 VDC controls used

### Warranty

All parts are covered for one year from the date of installation  
Extended warranty available for an additional cost

### Code Compliance

Lift complies with ASME A18.1-2008; However, due to various State and Local codes, a variance may be required from the "Authority Having Jurisdiction" (AHJ). Please contact LIFT-U for further assistance.



®



AIA Continuing Education Courses Available Online  
Also Approved for California State License Renewal (SB1608)

For More Information:  
(209) 838-2400  
information@hoganmfg.com



®