

# DON'T LET YOUR ACCESSIBILITY ISSUES DICTATE YOUR PROJECT'S AESTHETICS!

*LIFT-U, The Leader in Innovative Accessibility Products, introduces  
the "AccesStair<sup>®</sup>" Convertible Stairway / Wheelchair Lift!*

## Stairway Mode



- *Space Saving*
- *Universal Access*
- *No Pit Required*

- *Meets ADA Requirements*
- *Cycles Quickly from  
Stairway to Lift*



## Wheelchair Lift Mode


090406

Product Design Files At **Autodesk** Seek


Website: <http://liftu.hoganmfg.com>  
(The following US patent applies; 6,601,677 B1)




# Product Specifications

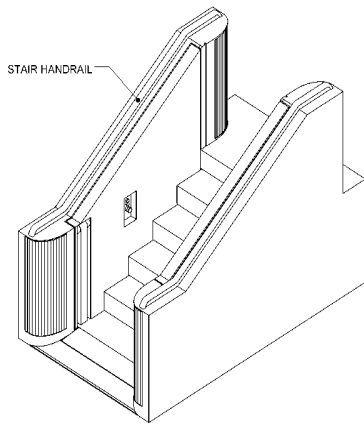

STEPS CONFIGURATION

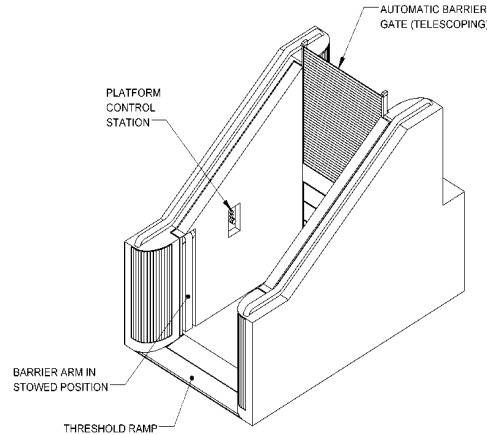

STEPS RETRACTED  
READY FOR PASSENGER INGRESS OR EGRESS

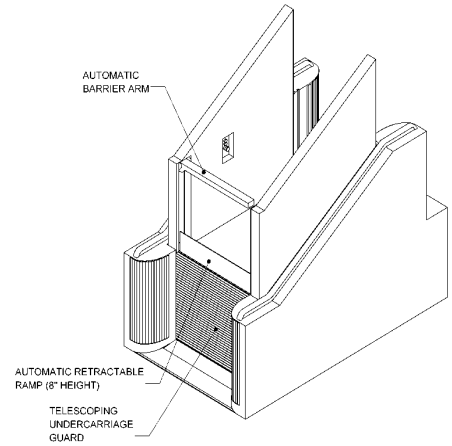

LIFT PLATFORM AT UPPER LANDING  
READY FOR PASSENGER INGRESS OR EGRESS

## Steps

- 5 inch to 7 inch rise available
- Standard treads are 18 inches wide by 11 inches deep
- Steps are locked in extended position for use as stairway
- Steps retract under upper landing when lift is operating

## Lift

- Vertical lift travel is 18 inches to 50 inches
- Lift platform size – 36 inches wide x 55 inches deep
- Rated capacity is 750 lbs
- Electric Motor drives mechanically synchronized screw columns
- No Pit Required

## Power and Controls

- Main Power, 230VAC, 3-Wire, 20A, Single Phase
- Battery Back-up is standard equipment.
- Independent Operation
- 24 VDC Controls
- Security Key

## Code Compliance

- Unit complies with ADAAG and ASME A18.1-2005. If your State has not adopted these standards a variance may be required.
- ETL Listed, certified to CSA B44.1 / ASME A17.5

## Safety

- Redundant switches and safeties insure reliable operation
- Microprocessor monitors all safety points and stops the unit if unsafe conditions are detected
- Powered barrier arm at lower entrance edge of platform
- Powered roll up barrier gate at upper entrance
- Beam sensors are located throughout the inner walls to detect the presence of persons or objects

## Finishes

- Standard show surface is a textured powder coated finish, taupe color. Other colors available for an additional charge.
- Standard floor treatment for lift platform, steps and upper landing is composite vinyl, black in color.
- First step nosing and upper landing nosing includes contrasting color. (Optional: Floor treatment for the upper landing can be covered with Owner supplied material to match project aesthetics. Arrangements for this option need to be made in advance.)

## Warranty

- All parts covered for one year from date of installation
- Optional Extended Warranty available for an additional charge.



## Internet Resources Available

**AIA Continuing Education Courses Available Online  
Also Approved for California State License Renewal (SB1608)**

**For More Information:**

**(209) 838-2400**

**<http://liftu.hoganmfg.com>**

**[information@hoganmfg.com](mailto:information@hoganmfg.com)**